


ELECTRICAL POWER SUPPLY: 24[Vdc] +/- 5%  
 CONNECTOR M8 MALE, 3 POLES:  
 - PIN 1(BROWN): +24[Vdc]  
 - PIN 3(BLUE): 0[Vdc]  
 - PIN 4(BLACK): PWM-CONTROL

PWM CONTROL PIN CONNECTION:  
 - +24[Vdc]: ILLUMINATOR ON  
 - 0[Vdc]: ILLUMINATOR OFF

100[mm] CABLE

RODER FIXING BRACKET 20x20 COD. 10-11-73

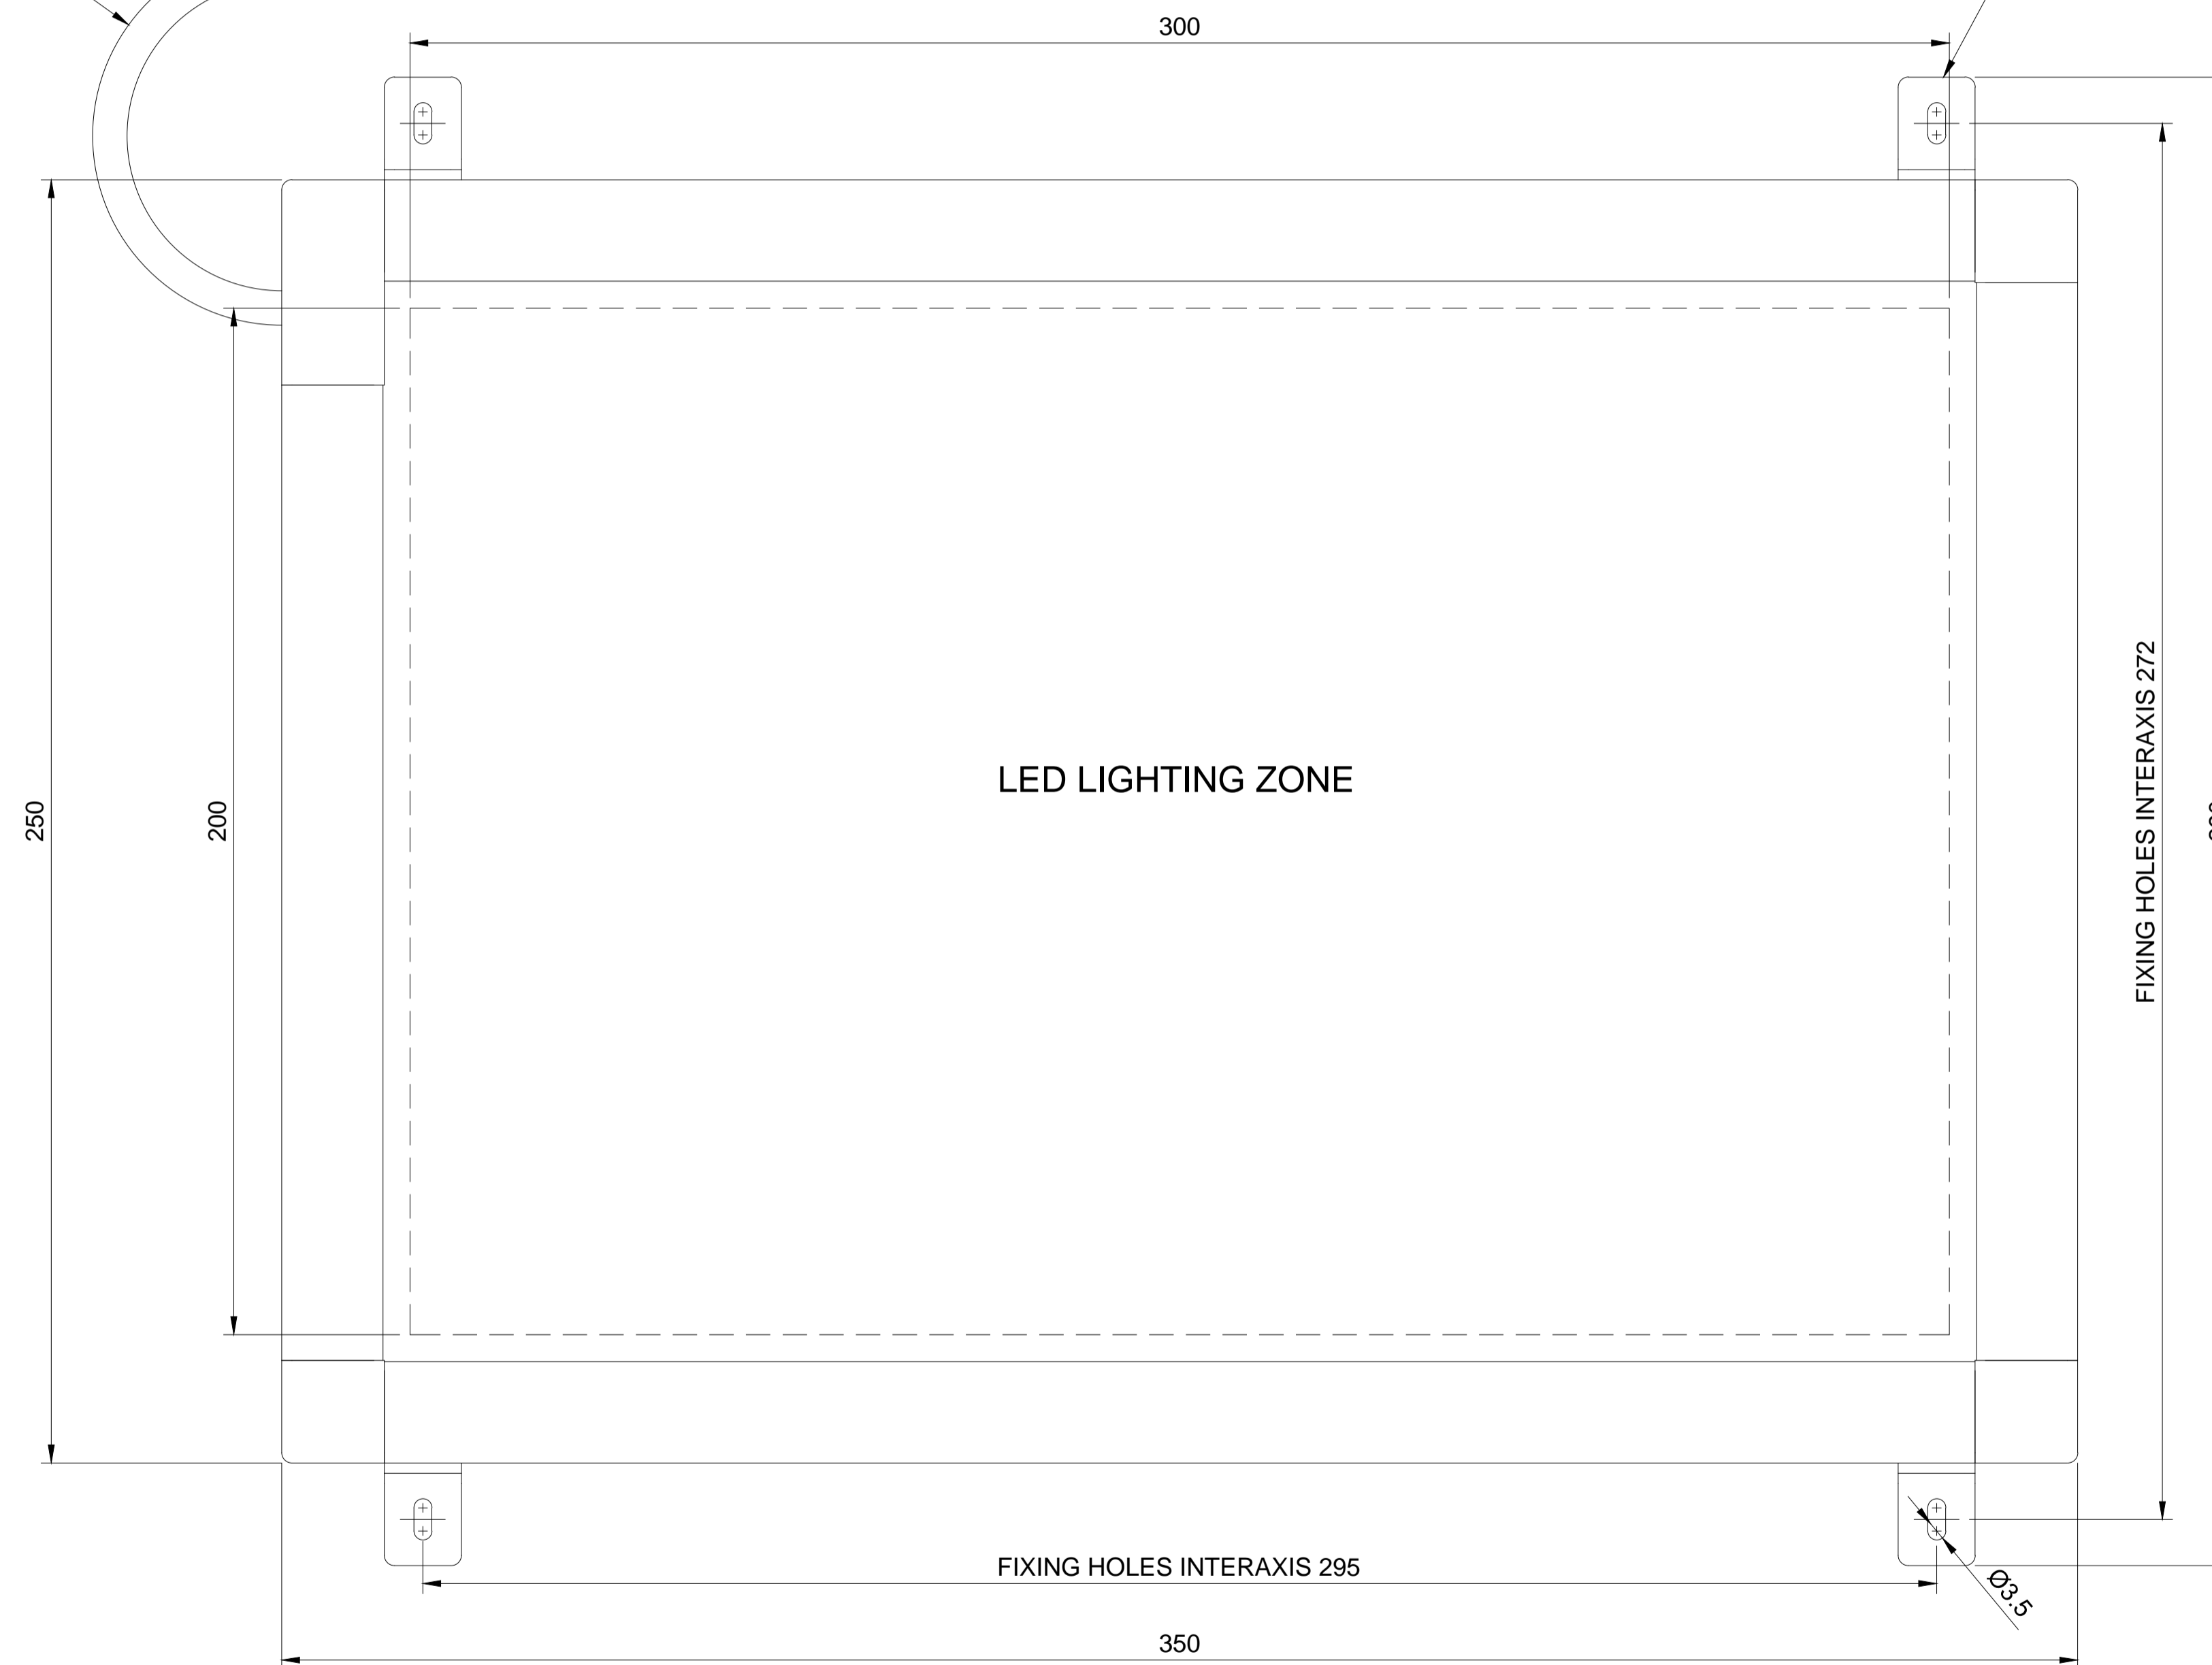

**PAY ATTENTION:**  
 install the illuminator so that the bottom wall is in direct contact with a flat metal surface. In this way the support surface of the illuminator will be able to guarantee an adequate dissipation of the heat produced by the LEDs. Maintaining a low illuminator temperature allows the average life of the LEDs to be lengthened and the light emission to remain stable.

3.2 [Surface texture symbol] Undimensioned chamfers 0.5x45°

Rev.	Description	Date	Slip.
E			
D			
C			
B			
A			

Revisions			
General machining tolerances: H11 hole - h11 shaft - linear dimensions ±0.1mm - angular values ±30'			
Surface texture according to UNI 9600-BS, unless otherwise specified. Geometrical tolerances according to UNI 7226-1.			
Product	BL3	Initial revision date (0)	17/06/2026
Designer	LSR	View	
Material		Scale	1:1
Treatment		Quantity	1
Description	BL3-200x300	Format	A1
		Table N/N	1/1
		Drawing number	