


4x CABLE WITHOUT TERMINAL:  
 - BROWN WIRE: +24[Vdc]  
 - BLUE WIRE: 0[Vdc]  
 - BLACK WIRE: PWM-CONTROL

PWM CONTROL WIRE CONNECTION:  
 - +24[Vdc]: ILLUMINATOR ON  
 - 0[Vdc]: ILLUMINATOR OFF

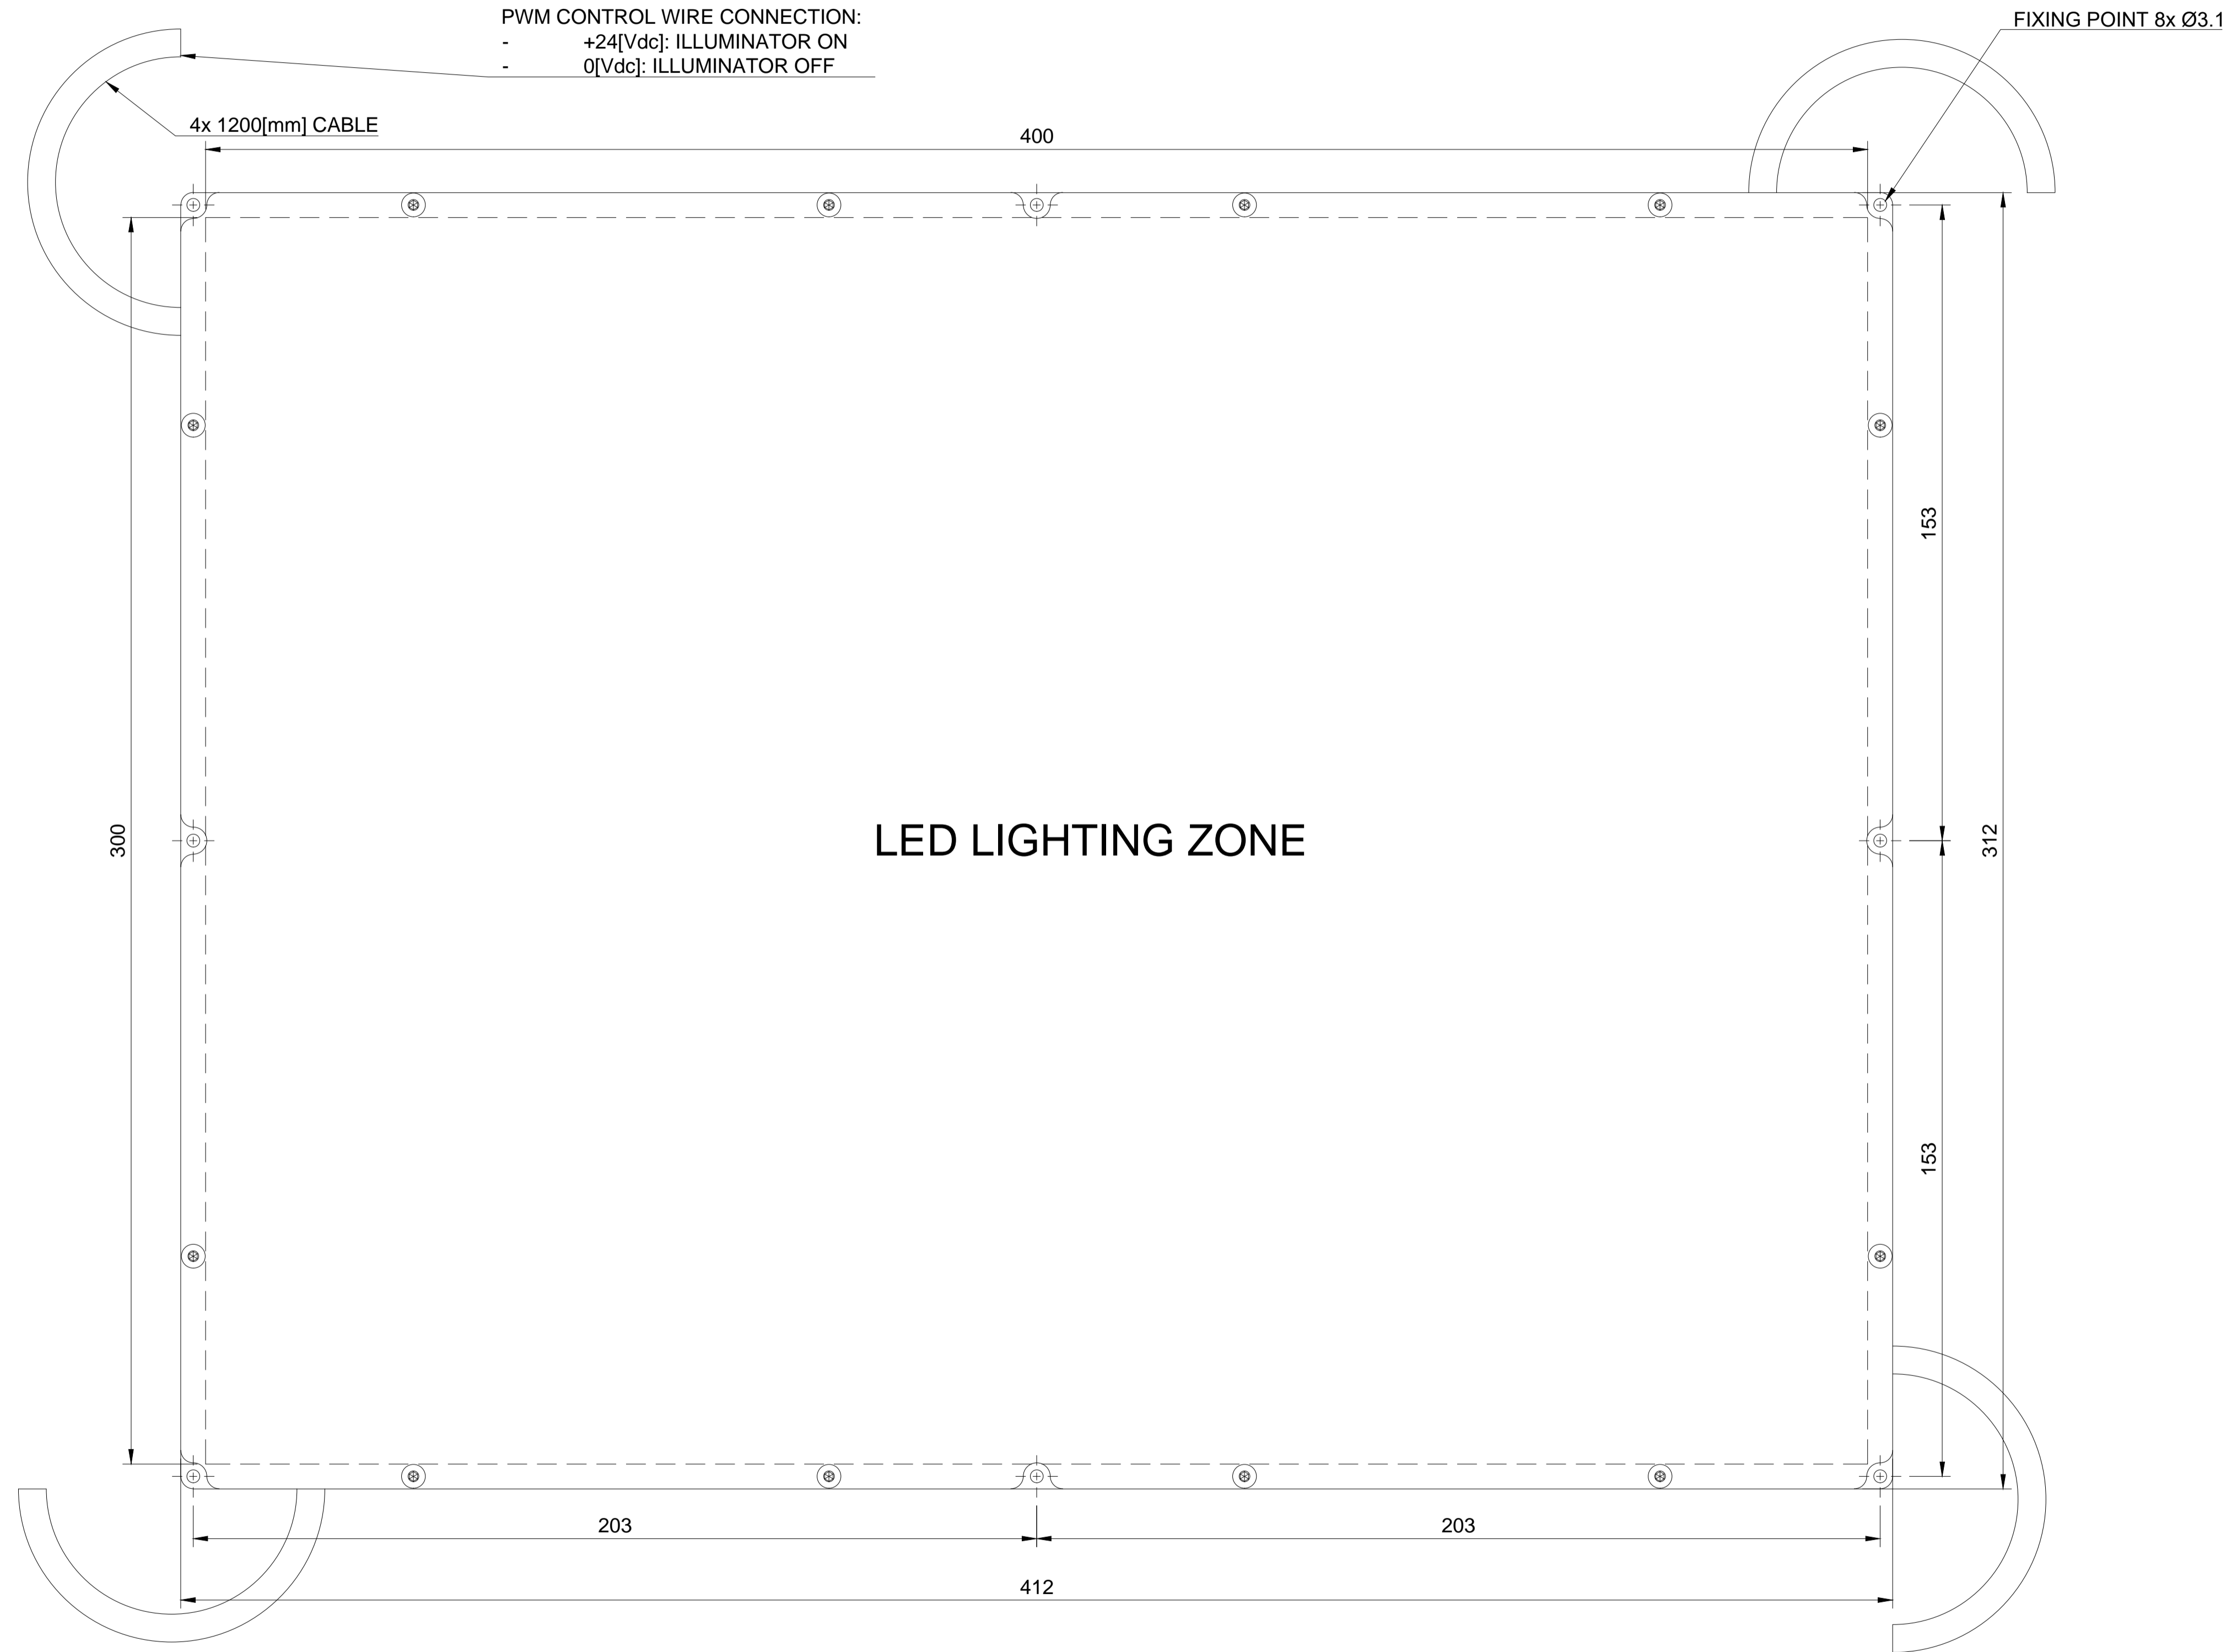

LED LIGHTING ZONE

**PAY ATTENTION:**  
 install the illuminator so that the bottom wall is in direct contact with a flat metal surface. In this way the support surface of the illuminator will be able to guarantee an adequate dissipation of the heat produced by the LEDs. Maintaining a low illuminator temperature allows the average life of the LEDs to be lengthened and the light emission to remain stable.

3.2 [Symbol] Undimensioned chamfers 0.5x45°

Revisions			
Rev.	Description	Date	Slp.

General machining tolerances: H11 hole - h11 shaft - linear dimensions ±0.1mm - angular values ±30'		Surface texture according to UNI 4600-BS, unless otherwise specified. Geometrical tolerances according to UNI 7226-1.	
	Product	DL8	Initial revision date (0)
	Designer	LSR	12/06/2026
Material	Scale	1:1	Format
Treatment	Quantity	1	A1
Description	Drawing number	DL8-300x400	Table N/N
			1/1

Revisions			
Rev.	Description	Date	Slp.