


- 2x CABLE WITHOUT TERMINAL:
- BROWN WIRE: +24[Vdc]
 - BLUE WIRE: 0[Vdc]
 - BLACK WIRE: PWM-CONTROL

- PWM CONTROL WIRE CONNECTION:
- +24[Vdc]: ILLUMINATOR ON
 - 0[Vdc]: ILLUMINATOR OFF

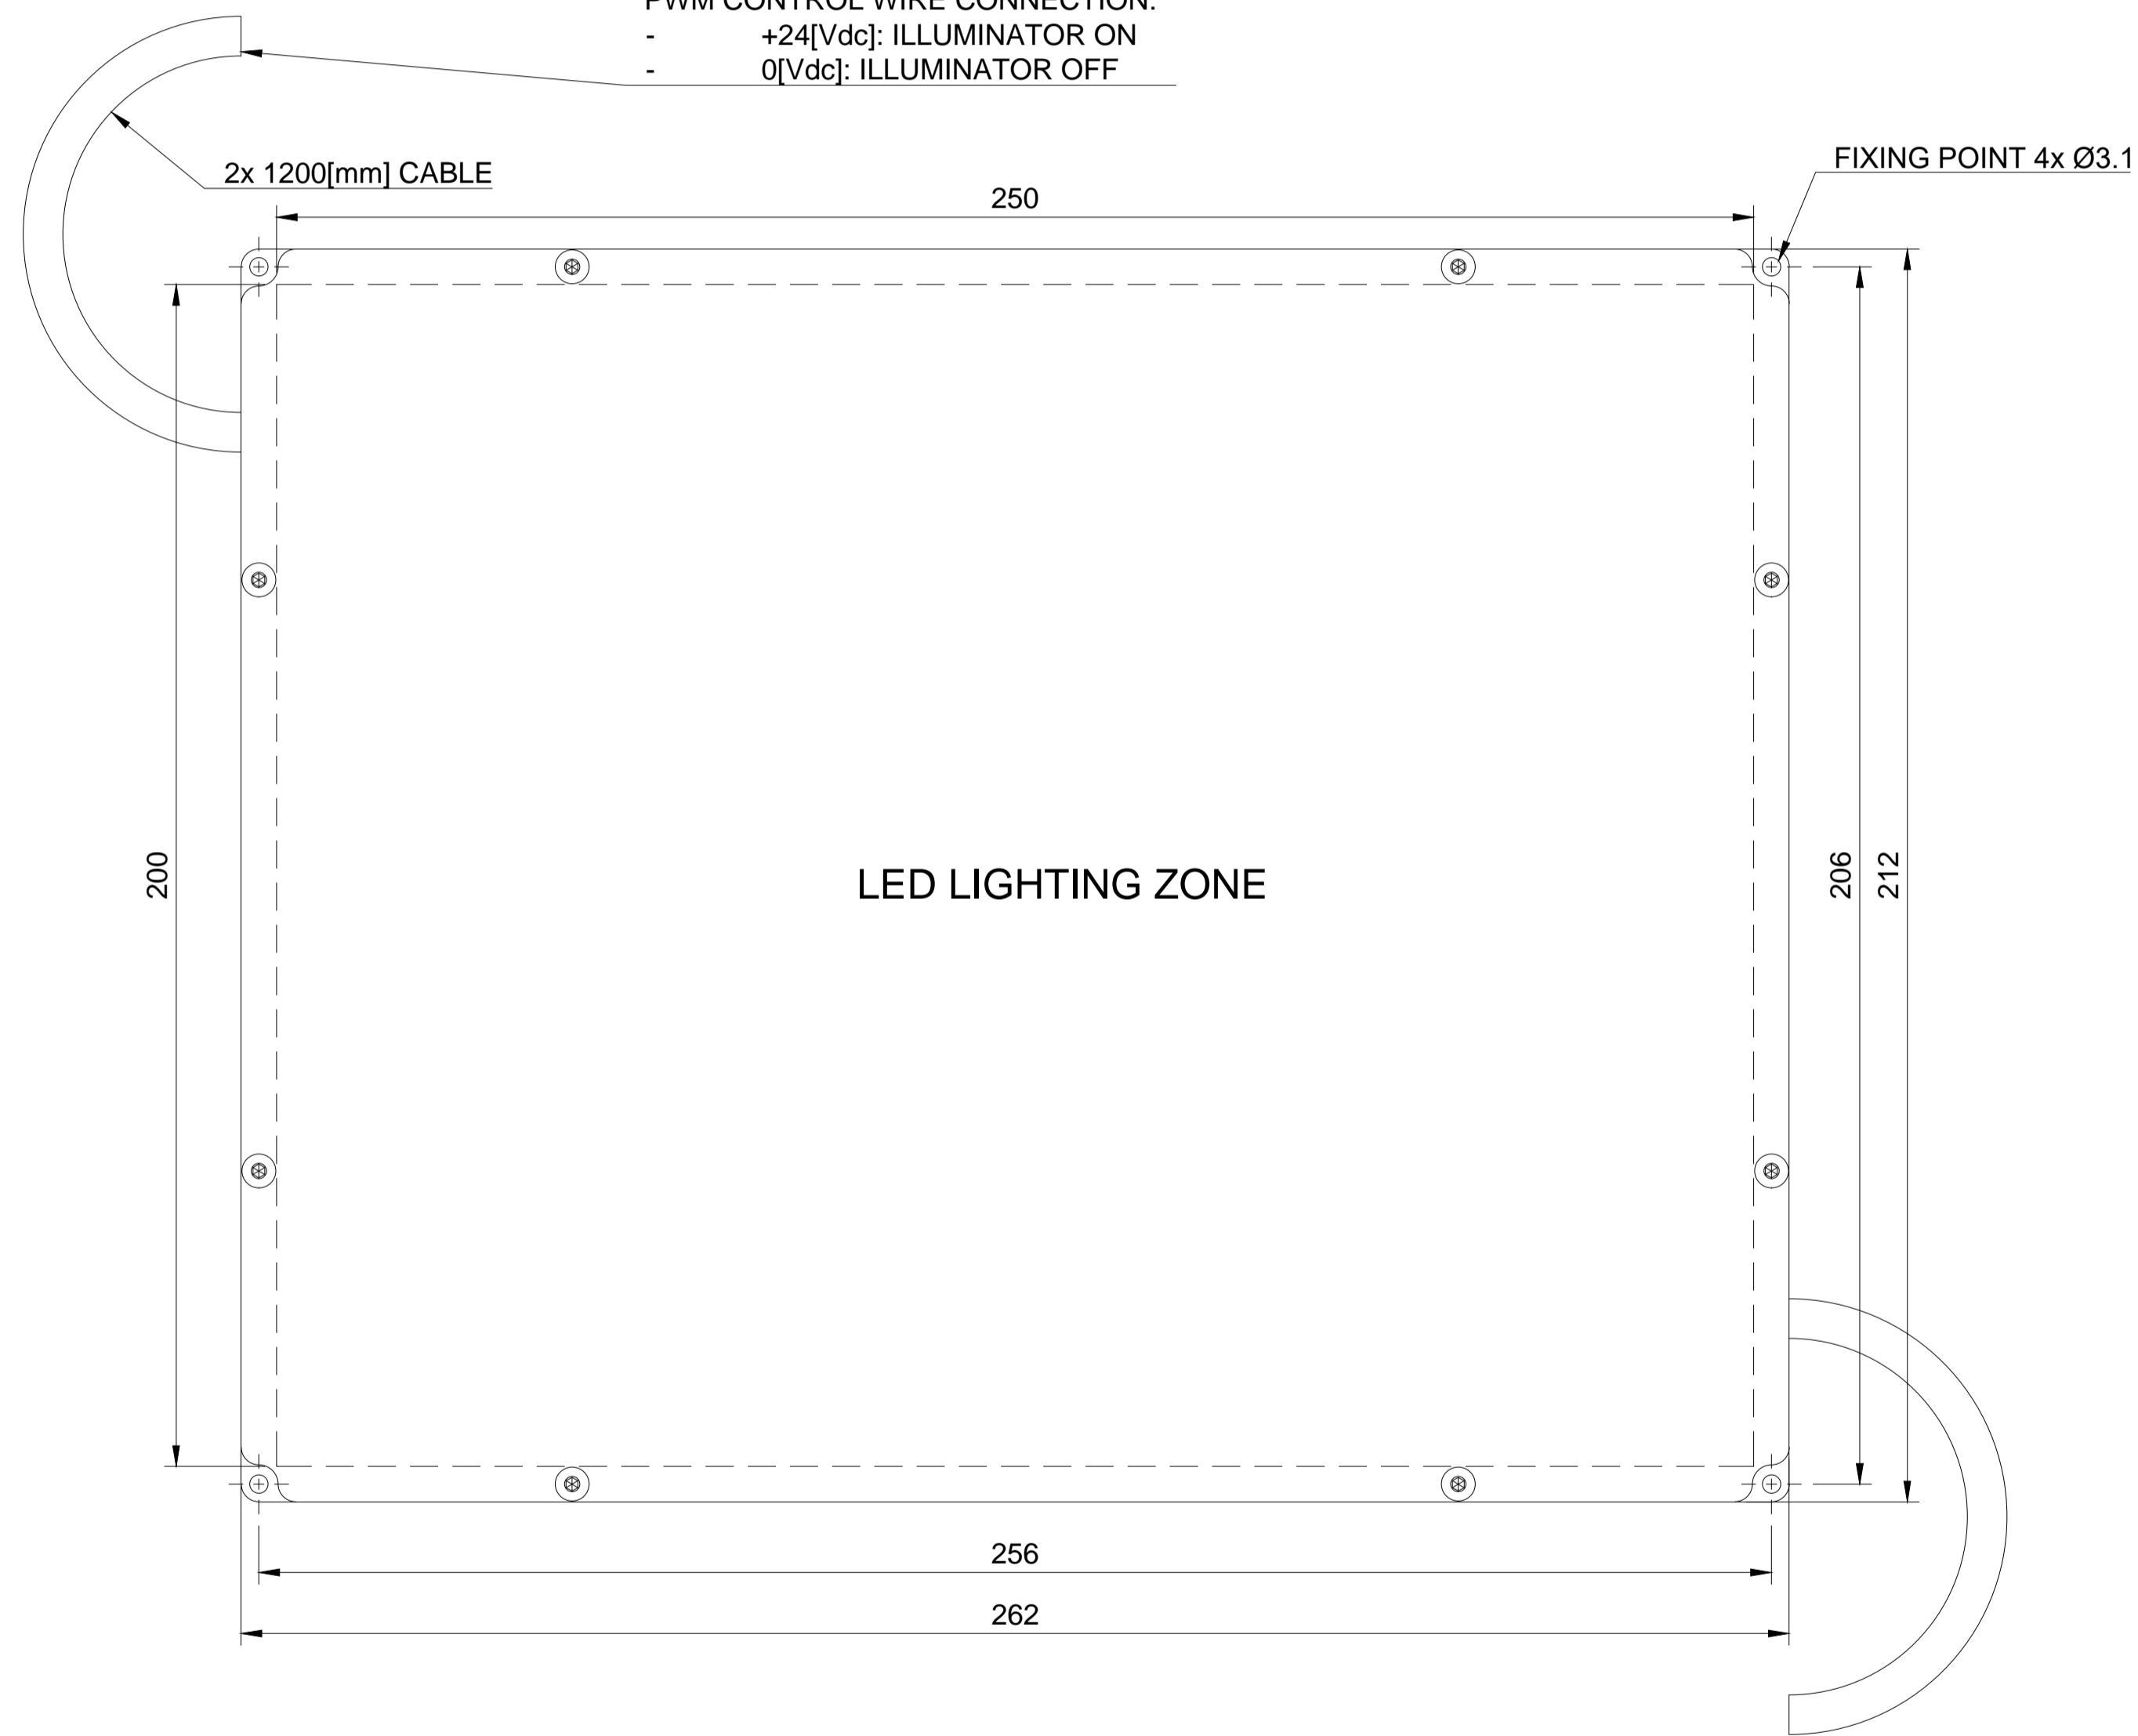

PAY ATTENTION:
 install the illuminator so that the bottom wall is in direct contact with a flat metal surface. In this way the support surface of the illuminator will be able to guarantee an adequate dissipation of the heat produced by the LEDs. Maintaining a low illuminator temperature allows the average life of the LEDs to be lengthened and the light emission to remain stable.

3.2 [Symbol] Undimensioned chamfers 0.5x45°

Rev.	Description	Date	Slp.
E			
D			
C			
B			
A			

Revisions			
General machining tolerances: H11 hole - h11 shaft - linear dimensions ±0.1mm - angular values ±30'			
Product		Initial revision date (0)	Group
RODER DL8		12/06/2026	
Designer		LSR	View
Material		Scale	Format
		1:1	A1
Treatment		Quantity	Table N/N
		1	1/1
Description		Drawing number	
DL8-200x250			
<small>Property of RODER s.p.a. - Via Italia 15/A - 10080 - Gignasio (TO) - ITALY - Copyright by RODER s.p.a. - All rights reserved. Without written authorization from RODER s.p.a., this drawing may not be used for the manufacturing of the object represented herein, nor disclosed to third parties. The owner company will protect its rights to the full extent of the law. Unauthorized use of the content of this document constitutes a criminal and civil offense.</small>			